

## Important Note




For best results, use VidaMount VESA brackets from VidaBox for this enclosure. They have been specifically fitted to work with this item.

Other VESA mounting hardware can only be used after carefully checking the VESA mount screw length (Step F). Too long a screw will crush and damage the tablet!

## F Check VESA Screw Length (on Non-VidaBox VESA Mounts)

With the VESA screws installed, look on the inside of the back plate.

Check to make sure that the screw DO NOT PROTRUDE beyond 1/16" from the back plate surface. See diagrams below.

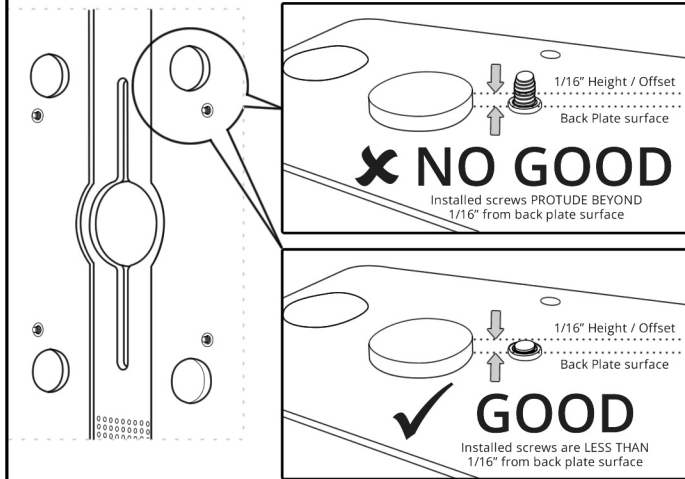

New, shorter screws will be needed. Using these screws WILL DAMAGE the tablet when the enclosure is fully assembled!

Proceed to Step G ONLY after the screw length is confirmed "Good."


## G Reassemble the Enclosure

Reinstall the screws removed in Step A.

Be sure the USB cable can be routed out of the enclosure. If not, go back to Step C and cut the grooves as needed.

USB Cable

The tablet is now securely installed in the enclosure!

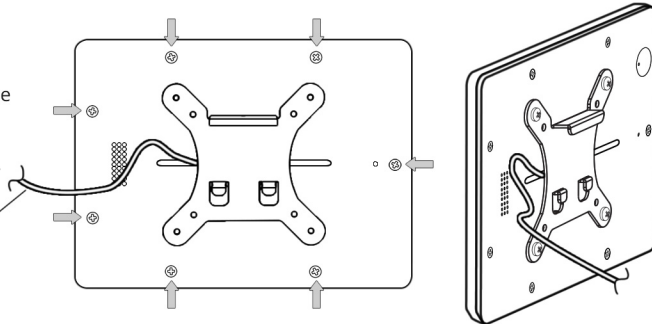


 **VIDABOX**  
125 Newtown Rd, Ste 100  
Plainview, NY 11803 USA

Toll-free US: (844) 4-KIOSKS  
Worldwide: +1 516-499-5050  
Australia: +61 1300 44 VIDA  
EU/UK: +44 333 444 VIDA

# INSTALLATION GUIDE

## VidaMount VESA Tablet Enclosure

Designed to securely enclose tablets  
Fits the specific tablet model - See product sticker  
Compatible with VESA 100x100 mounts

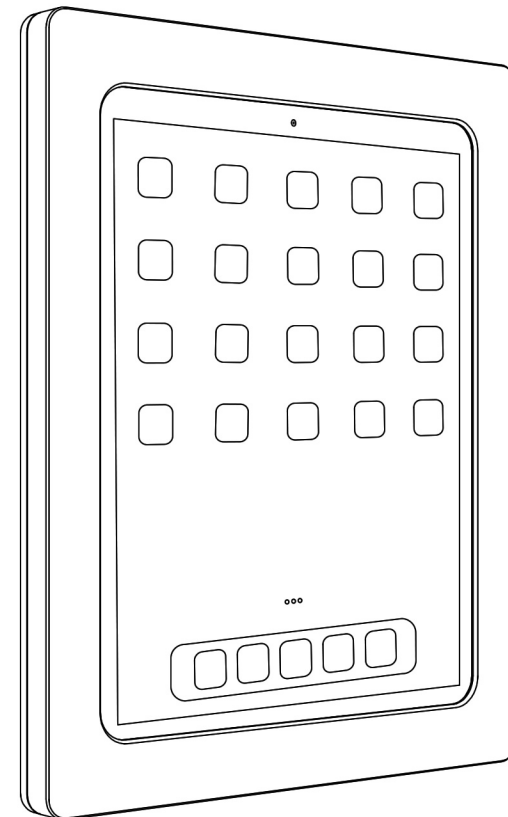

US Patent No. 20220205284  
[Tablet is shown for illustrative purposes & not included]

# Installation Instructions

## VidaMount VESA Tablet Enclosure


### Important Note



For best results, use VidaMount VESA brackets from VidaBox for this enclosure. They have been specifically fitted to work with this item.

Other VESA mounting hardware can only be used after carefully checking the VESA mount screw length (Step F). Too long a screw will crush and damage the tablet!

### Component Checklist




Tablet Enclosure  
(Already Assembled)

#### TOOLS YOU'LL NEED (not included)



Phillips head  
Screwdriver




Knife / Box Cutter  
(OPTIONAL)



### A Disassembling the Enclosure

Remove the flat-head screws as shown. Set aside the loose hardware carefully. We will need this hardware again later.

We now have (2) pieces:  
A. The front face plate  
B. The back plate

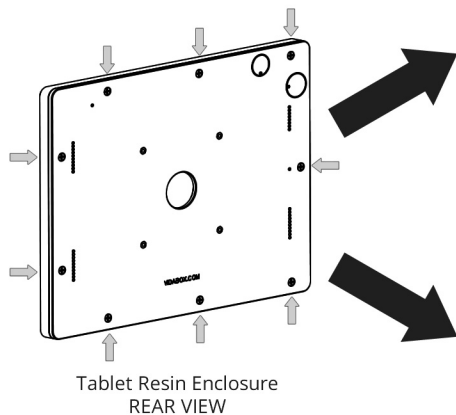


A. FRONT FACE PLATE



B. BACK PLATE

**IMPORTANT:** Diagrams are generalized. Your exact enclosure will appear slightly different!

### B Optional : Remove Power/Vol. Button/Camera Knockout

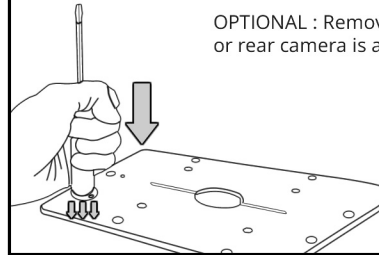

OPTIONAL : Remove only if access to the power button, volume button, or rear camera is always required.

[1] Hold or clamp the Back Plate onto a sturdy surface.

[2] Using the blunt end of the screwdriver, press down on the circular knockout, as shown.

This will pop out the access panel.

### C Optional : Cut Wiring Grooves (Only if Needed)


OPTIONAL : Remove only if necessary.

If you're using a VESA mount where the center wiring hole is blocked, use a knife / box cutter, and cut out the grooves.

This will allow the tablet's wires to be routed properly.

Grooves  
Can Be Cut

Center  
Wiring Hole

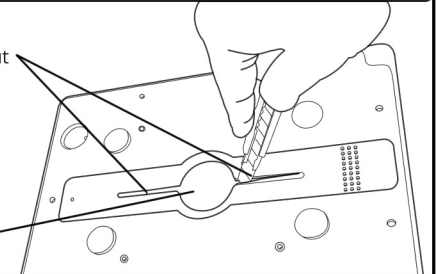

### D Install Tablet into Front Face Plate


Orient the tablet properly and install it into the front face plate as shown.

Be sure the power button, volume buttons, and USB cable ports line up properly.

**PRO-TIP** Expect a **TIGHT** cable fit  
This is **BY DESIGN**


Connect the USB cable now & guide it towards the center.

It will be routed through the center exit hole (dashed circled) in the next steps.

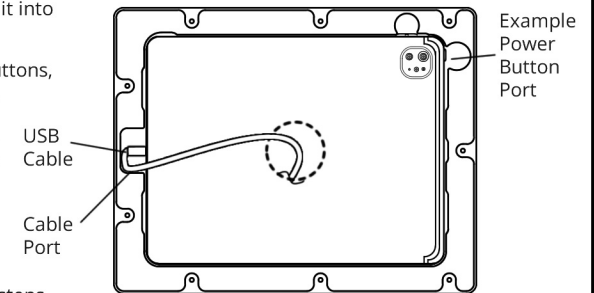

### E Install VESA Mount onto Back Plate

Install the VESA Mount onto the back plate of the Tablet Enclosure.

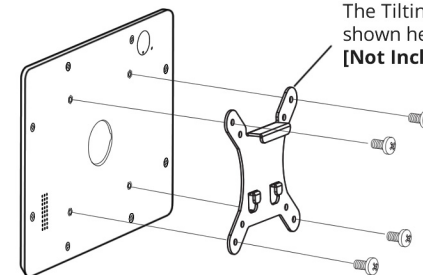

The Tilting Wall Mount is shown here as an example.  
**[Not Included / Sold Separately]**

**PRO-TIP**

VESA bracket shape & appearance will vary based on which model you selected