
Important Note



For best results, use VidaMount VESA brackets (from VidaBox) for this enclosure. They have been specifically fitted to work with this item.

Other VESA mounting hardware can only be used after carefully checking the VESA mount screw length (Step F). Too long a screw will crush and damage the iPad!

Check VESA Screw Length (On non-VidaBox VESA Mounts) With the VESA screws Check to make sure that the screw lengths DO NOT PROTRUDE beyond 1/16" from the installed, look on the inside of the back plate. back plate surface. See diagrams below. New, shorter screws will be 1/16" Height / Offset needed. Using these screws WILL DAMAGE the tablet when enclosure is fully assembled! nstalled screws PROTUDE BEYOND /16" from back plate surface 1/16" Height / Offset Proceed to Step G ONLY after the screw length is confirmed "Good." Installed screws are LESS THAN

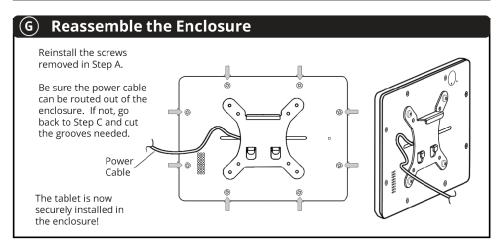



Plainview, NY 11803 USA


Toll-free US: (844) 4-KIOSKS Worldwide: +1 516-499-5050 Australia: +61 1300 44 VIDA EU/UK: +44 333 444 VIDA

INSTALLATION GUIDE

VidaMount VESA Tablet Enclosure For Microsoft Surface Pro 8 Tablets

VB_VESA_SPRO8

Designed to securely enclose Microsoft Surface Pro 8 tablets
Fits Microsoft Surface Pro 8 tablets ONLY
Compatible with VESA 100x100 mounts

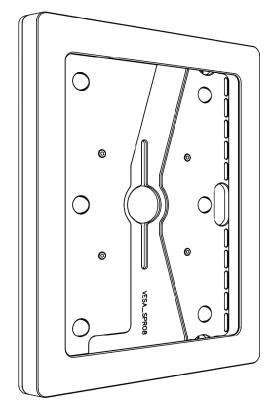

(Tablets are shown for illustrative purposes & not included)

Installation Instructions

VidaMount VESA Tablet Enclosure **Microsoft Surface Pro 8**

Important Note



For best results, use VidaMount VESA brackets (from VidaBox) for this enclosure. It has been specifically fitted to work with this item.

Other VESA mounting hardware can only be used after carefully checking the VESA mount screw length (Step F). Too long a screw will crush and damage the tablet!

Component Checklist



Surface Pro 8 Resin Enclosure (Already assembled)

TOOLS YOU'LL NEED (not included)



Phillips head Screwdriver



Knife / Box Cutter (OPTIONAL)


Disassembling the Enclosure

Remove the flat-head screws as shown. Set aside the loose hardware carefully.

We will need this hardware again ater.


We now have (2) pieces: A. The front face plate


B. The back plate



Tablet Resin Enclosure **REAR VIEW**


IMPORTANT: Diagrams are generalized. Your exact enclosure may appear slightly different! A. FRONT FACE PLATE





B. BACK PLATE

Optional: Remove Knockouts (If needed) For Power & Volume Button / Rear Camera Exposure

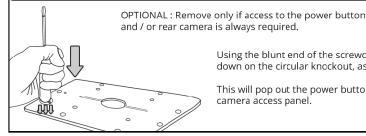

Using the blunt end of the screwdriver, press down on the circular knockout, as shown.

This will pop out the power button / rear camera access panel.

Optional: Cut Wiring Grooves (If needed) Grooves OPTIONAL: Remove only if necessary. can be cut If using a VESA mount where the center wiring hole is blocked, use a knife / box cutter, and cut out the grooves. This will allow the tablet's Center wires to be routed properly. wiring hole

