INSTALLATION GUIDE
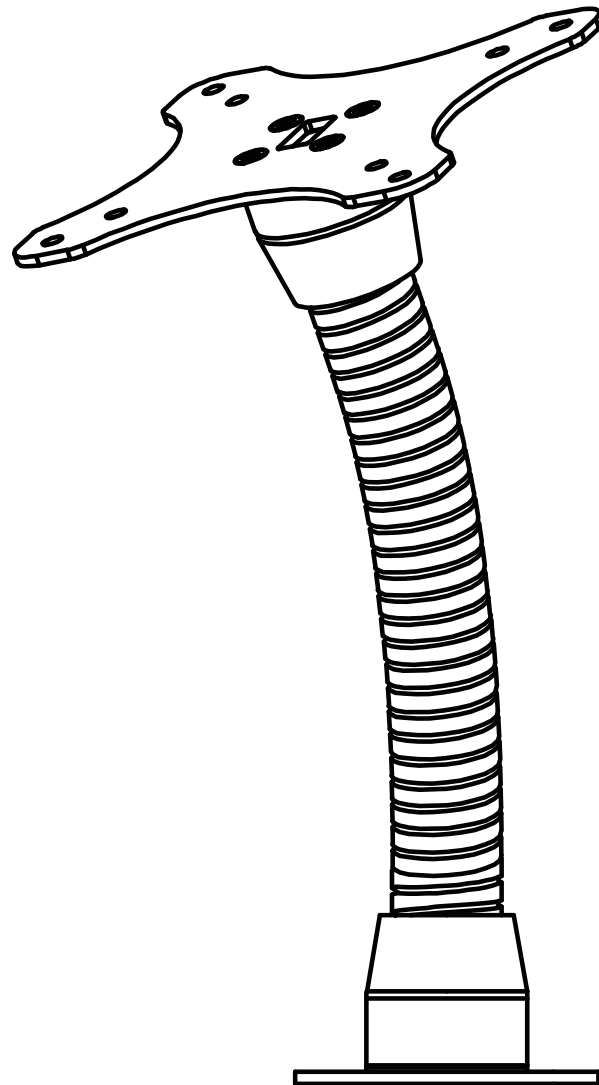## Flexible Surface VidaMount

VB_VESA_MNT_FLX

Ideal for VidaMount VESA Tablet Enclosures

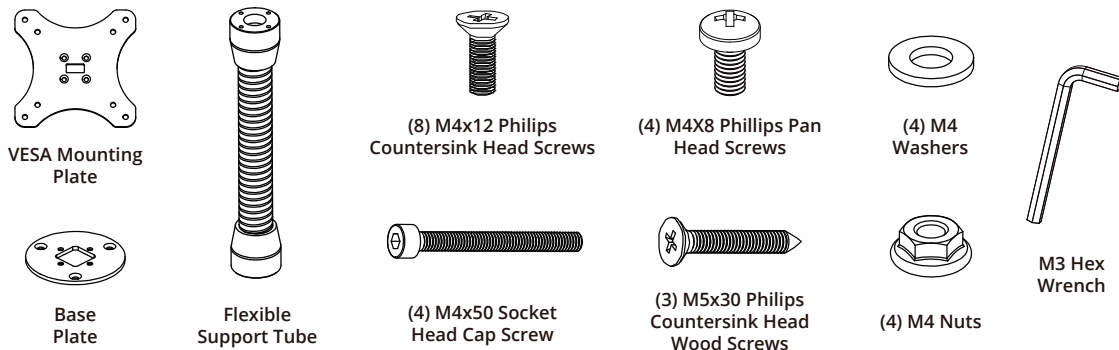**VESA 100x100 & 75x75 compatible**

Installation Instructions
Flexible Surface Mount : VESA Compatible
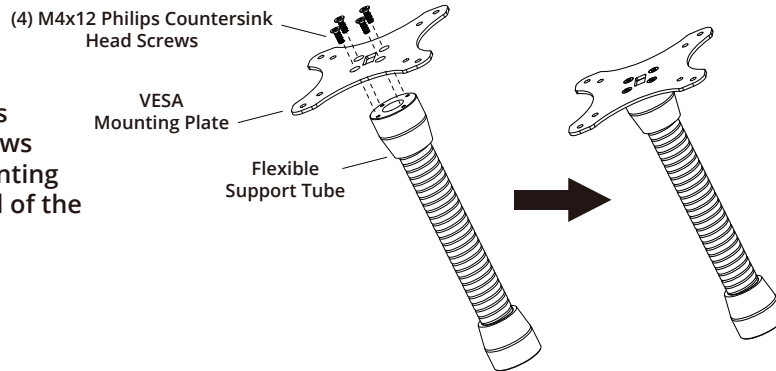
Important Note:

- If charging is desired, please prepare the extension cable and/or charging solution for the VESA tablet first. Installing the charging solution / extension cable will be easier to do now than it will be to do later.

- VESA : 75 x 75 (3" x 3") and 100 x 100 (4" x 4") compatible.

Component Checklist:

VESA Mounting Plate

Base Plate

Flexible Support Tube

(8) M4x12 Philips Countersink Head Screws

(4) M4x50 Socket Head Cap Screw

(4) M4X8 Phillips Pan Head Screws

(3) M5x30 Philips Countersink Head Wood Screws

(4) M4 Washers
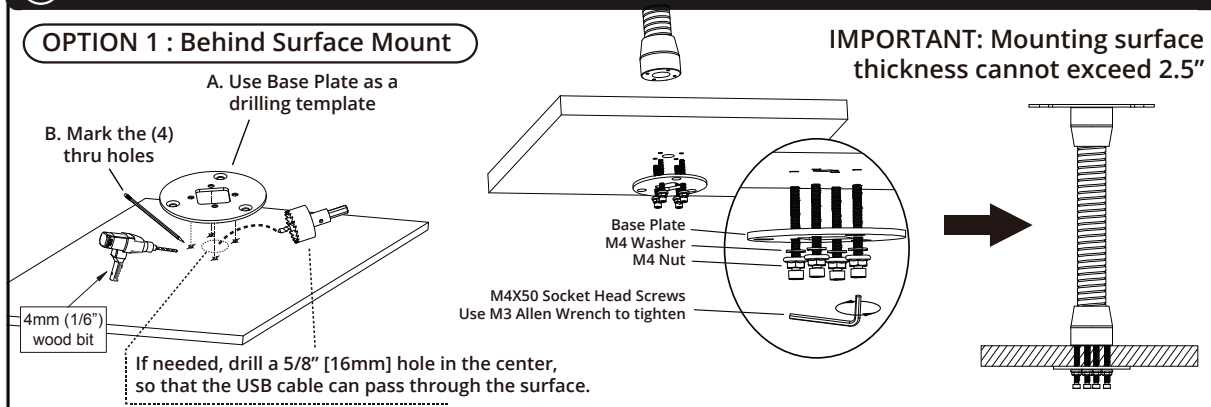
(4) M4 Nuts

M3 Hex Wrench

① Assemble the Flexible Support Tube & VESA Mounting Plate

Install (4) M4x12 Philips Countersink Head Screws through the VESA Mounting Plate, and into one end of the Flexible Support Tube.

(4) M4x12 Philips Countersink Head Screws

VESA Mounting Plate

Flexible Support Tube

② Decide how the surface mount sould be secured

OPTION 1 : Behind Surface Mount

A. Use Base Plate as a drilling template

B. Mark the (4) thru holes

4mm (1/6") wood bit

If needed, drill a 5/8" [16mm] hole in the center, so that the USB cable can pass through the surface.

IMPORTANT: Mounting surface thickness cannot exceed 2.5"

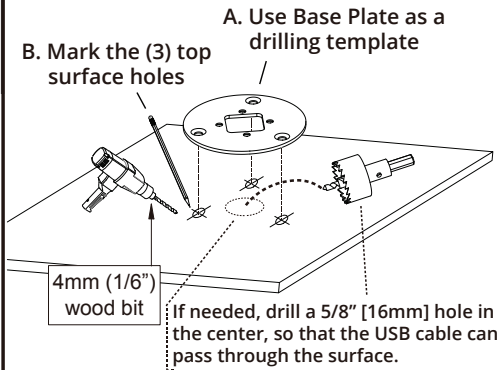Base Plate
M4 Washer
M4 Nut

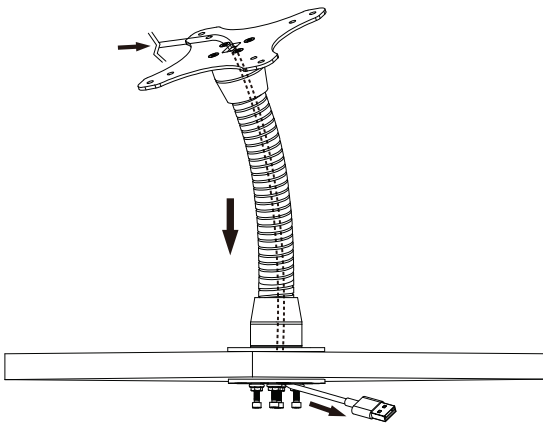M4X50 Socket Head Screws
Use M3 Allen Wrench to tighten

[Continued] ② Decide how the surface mount sould be secured

OPTION 2 : On-Surface Mount

IMPORTANT: Mounting Surface thickness cannot exceed 2.5"

A. Use Base Plate as a drilling template

B. Mark the (3) top surface holes

4mm (1/6") wood bit

If needed, drill a 5/8" [16mm] hole in the center, so that the USB cable can pass through the surface.

Flexible Support Tube

Base Plate

M4x12 Philips Countersink Head Screws

(3) M5x30 Philips Countersink Head Wood Screws
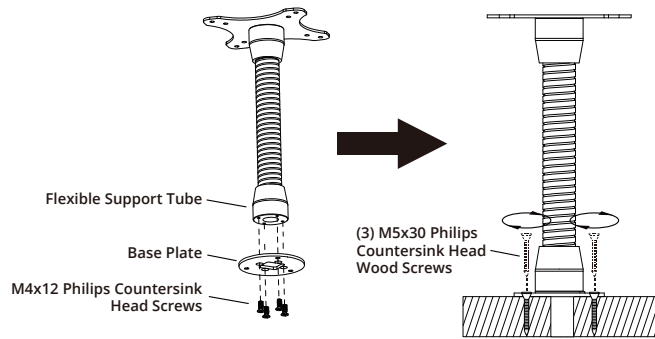
③ Install USB Cable / Wire Run

④ Install VESA-Ready Enclosure

M4x8 Philips Head Screws

Dimensions / Diagrams

120.0
22.0
Ø5.2
Ø18.0
Bottom View
22.0

2.5
234.9
3.0
Front View

120.0
Ø40.0
Ø27.0
Ø75.0
Left View

100.0
75.0
22.0
Top View
100.0
75.0
9.0
22.0
18.0