

 VIDABOX

MODEL  
**SLIM**



# Hardware Installation Guide



VIDABOX™ – SLIM™

# Hardware Installation Guide


---

© VidaBox LLC  
172 Garden Street • Garden City, NY 11530  
Support: <http://www.vidabox.com/support>

# Table of Contents

|   |    |   |    |
|---|----|---|----|
| Introduction                                | 4  | Connect the Video Output                  | 12 |
|   |    | ▪ Which Video Output/Cable Are You Using? | 12 |
|   |    | ▪ Connecting via VGA/DVI/DVI-HDMI         | 12 |
|   |    | ▪ Connecting via Component                | 12 |
|   |    | ▪ Connecting via S-Video                  | 13 |
|   |    | ▪ Connecting via Composite                | 13 |
|   |    | ▪ Connecting via Coaxial                  | 13 |
|   |    | Connect the Audio Output                  | 14 |
|   |    | ▪ Which Audio Output/Cable Are You Using? | 14 |
|   |    | ▪ Connecting via Analog Sound             | 14 |
|   |    | ▪ Connecting via Digital Sound            | 14 |
|   |    | Connect the Wireless Keyboard             | 15 |
|   |    |   |    |
|   |    | CHAPTER 3                                 |    |
|   |    | POST INSTALLATION                         |    |
|   |    | The Next Step                             | 16 |
|   |    |   |    |
|   |    | CHAPTER 4                                 |    |
|   |    | SERVICE INFORMATION                       |    |
|   |    | Service Information                       | 17 |
|   |    | ▪ Contact your Dealer/Place of Purchase   | 17 |
|   |    | ▪ Contact VidaBox LLC                     | 17 |
|   |    |   |    |
| CHAPTER 1                                   |    |   |    |
| OVERVIEW                                    |    |   |    |
| How to Best Use This Guide                  | 5  |   |    |
| Parts List                                  | 6  |   |    |
| ▪ Standard Accessories                      | 6  |   |    |
| ▪ Optional Accessories                      | 6  |   |    |
|   |    |   |    |
| CHAPTER 2                                   |    |   |    |
| INSTALLATION                                |    |   |    |
| VidaBox™ Diagrams                           | 7  |   |    |
| VidaBox™ Placement                          | 8  |   |    |
| Connect the:                                |    |   |    |
| ▪ Power Cable                               | 8  |   |    |
| ▪ Wireless Keyboard Receiver                | 8  |   |    |
| ▪ Remote Receiver                           | 8  |   |    |
| ▪ FM Antennas                               | 8  |   |    |
| ▪ LAN Port                                  | 9  |   |    |
| ▪ USB Card Reader                           | 9  |   |    |
| ▪ Wireless USB Networking Module (Optional) | 9  |   |    |
| ▪ HDTV Over-the-air Antenna (Optional)      | 9  |   |    |
|   |    |   |    |
| Connect the TV Input                        |    |   |    |
| ▪ Do You Have a Set-top Box (STB)?          | 10 |   |    |
| ▪ Connecting Directly from a Coaxial cable  | 10 |   |    |
| ▪ How Many STBs Do You Have?                | 10 |   |    |
| ▪ Connecting a Splitter                     | 10 |   |    |
| ▪ How Did You Connect the TV to the STB?    | 11 |   |    |
| ▪ Connecting from a Coaxial Cable           | 11 |   |    |
| ▪ Connecting from S-Video/RCA Cable         | 11 |   |    |

---

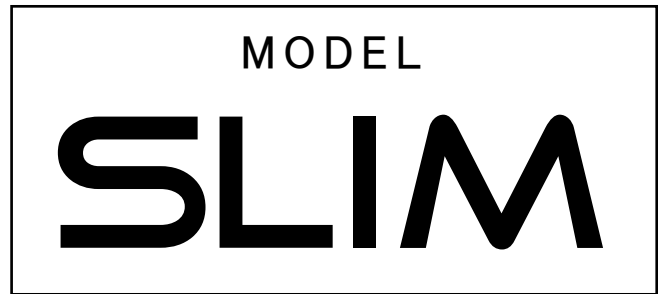

## Introduction

*Congratulations on your purchase of the VidaBox SLIM™! You have made an investment in attaining a state-of-the-art audio and visual experience for your home!*

**T**he VidaBox™ is the culmination of research in the latest home audio and visual technology.

This “all-in-one” device combines the functions of multiple home entertainment components, such as a DVD player, a CD/MP3 player, a computer, and TiVo® box into one, easy-to-use appliance (unit).

Every VidaBox™ is preconfigured for easy installation and minimal setup time. Everything works right out of the box.

All of our systems are fully featured, providing an unmatched digital experience.

We hope you enjoy using your VidaBox SLIM™, and encourage you to read through this comprehensive installation guide if you decide to install it yourself. Please be sure to check out our website and support forum, where new features, questions, and answers are available everyday.

Enjoy your VidaBox™ and have a great entertainment experience!







Sincerely,

Steven W. Cheung  
Owner

Sergio DeAlbuquerque  
Owner

## How to Best Use This Guide

**I**n order to avoid improper installation, we recommend that you read through this guide and follow the setup steps carefully.

| I C O N   K E Y   |                             |
|---|-----------------------------|
|  | New Section                 |
|  | Checklist Items             |
|  | Valuable Information        |
|  | Answer Before Proceeding    |
|  | Move on to the next section |
|  | Keyboard Required           |

Please pay close attention to these icons. They alert you to key pieces of information that are needed for a successful installation of the VidaBox™.

If your system is professionally installed, the installation technician should go over the main features of the VidaBox™ with you. Keep this booklet as a reference guide in case it is needed in the future, and read over the User's Guide next.

We hope you enjoy using your VidaBox SLIM™, and encourage you to read through this comprehensive installation guide if you decide to install it yourself. Please be sure to check out our website and support forum, where new features, questions, and answers are available everyday.

|   |       |
|---|-------|
| <b>FILL IN AND SAVE</b>   |       |
| Look in the rear of your VidaBox™ and locate the serial number & Windows Product Key. Write it here and retain it for future reference. |       |
| Serial No.  | _____ |
| Date of Purchase  | _____ |
| Windows Product Key:  | _____ |



## ➤ Parts List

Please check and make sure all of the parts below are in your box before getting started. See the Packing List to find which optional accessories came with your VidaBox SLIM™.

- ✓ VidaBox SLIM™ Unit (Black or Silver)
- ✓ This Installation Guide
- ✓ Comprehensive User's Guide
- ✓ SLIM™ Quick Hardware Installation Guide
- ✓ Standard & Optional Accessories – Check List below
- ✓ Software Configuration Guide
- ✓ Troubleshooting Guide



### Missing Parts?


Don't panic!! Simply call the dealer or your place of purchase immediately and someone will be able to assist you.

## Standard Accessories

- ✓ Standard 120V 3-prong Power Cable
- ✓ High Quality 6' RCA Audio Cable
- ✓ High Quality 6' S-Video Cable
- ✓ Two (2) FM antennas
- ✓ Wireless keyboard USB RF Receiver
- ✓ Wireless RF keyboard with integrated trackball & storage sack (33' range)
- ✓ Remote receiver dongle with two (2) IR blasters
- ✓ TV-Out Dongle – for S-Video, Component Video Outputs
- ✓ 7-in-1 USB card reader
- ✓ 3.5mm to L/R RCA Adapter
- ✓ 1-to-2 Coaxial Cable splitter
- ✓ Two (2) Short Coaxial cables
- ✓ Microsoft Media Center Remote

## Optional Accessories

- ✓ Harmony® Programmable Remote
- ✓ Karaoke Kit 400 or Karaoke Kit 900 – 400 or 990 songs with songbook
- ✓ Wireless Microphone Kits - Two (2) microphones with integrated mixer
- ✓ HDTV: Additional 1-to-2 Coaxial Splitter with two (2) Short Coaxial cables
- ✓ Wireless USB Networking Adapter



## ➤ VidaBox Diagrams

Please take some time to familiarize yourself with the SLIM™ before proceeding.

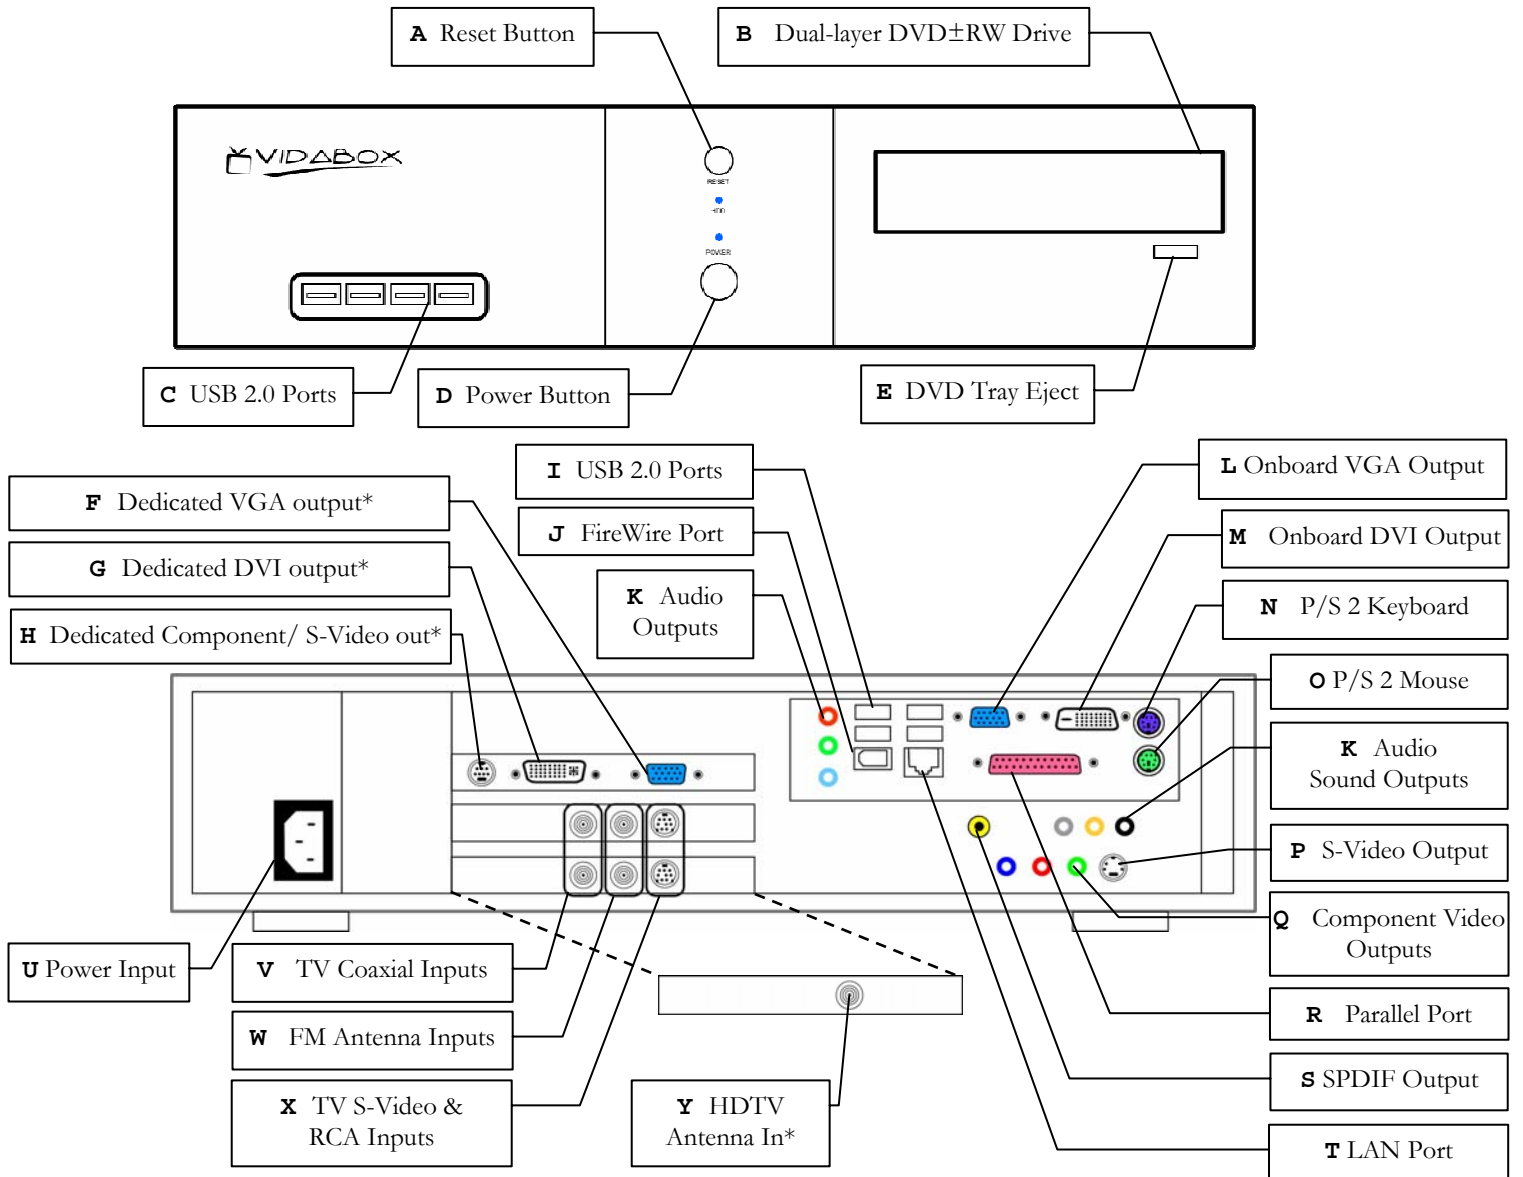


FIGURE 1.0 – VIDABOX SLIM™ FRONT & BACK PANELS

\* - Optional

We recommend that the VidaBox™ be professionally installed to yield the best possible audio-visual experience.

Please familiarize yourself with the **Quick Hardware Installation Guide** and its diagrams before proceeding.



**Help! My Parts Look Different!**

These pictures are for illustration only. The parts in your box may look slightly different.

➤ **VidaBox™ Placement**

The VidaBox™ should be placed in a well-ventilated area. This will help facilitate the exchange of heat out of the system, thereby minimizing operating fan noise. At a minimum, any area with a fan grille should have about four (4) inches of clearance. This will allow fresh air to circulate through the SLIM™.



Power Cable

➤ **Connect the Power Cable U**

Connect the Power Cable into the U Power Input. Make sure it is plugged in securely.



Wireless Keyboard Receiver

➤ **Connect the Wireless Keyboard Receiver I**

Then, connect the USB keyboard receiver into any available USB port. The keyboard receiver should be placed in an open area for best performance. Like the wireless module, you will want to connect it in the back I USB Ports using the included USB extension cable.



IR Remote Receiver

➤ **Connect the Remote Receiver I**

Next, connect the USB remote receiver into any available USB port. This adapter needs a clear line-of-sight to your entire room.



FM Antennas

➤ **Connect the FM Antennas W**

Connect the two included FM Antennas into the W FM Antenna Inputs. Make sure they are connected securely.



CAT-5 Ethernet Cable

## ➤ Connect the LAN Port **T**

If you have a hard line internet connection available, you can connect to it directly with a CAT-5 Ethernet cable to the **T LAN Port**.



USB Card Reader

## ➤ Connect the USB Card Reader **C**

Connect the USB card reader remote receiver into any available USB port. You may wish to connect this in the front **C USB ports** for easy access, and store it away when it's not in use to minimize clutter.



Wireless / WiFi module

## ➤ Connect the Wireless USB Networking Module **I** (Optional)

Simply stick the wireless module into any available USB port. For optimum connection, you can use the included USB extension cords to connect it to the back **I USB Ports**, so that it is hidden.



HDTV-OTA Antenna

## ➤ Connect the HDTV Over-the-air Antenna **Y** (Optional)

If you purchased a HDTV model, connect your HDTV over-the-air antenna to the **Y HDTV Antenna In** port at the rear of the VidaBox.



1-to-2 coaxial splitter

If there are two HDTV antenna inputs on your unit, an additional set of two short coaxial cables and a splitter have been included so you can split the incoming signal. Connecting the incoming cable to the **In** port of the 1-to-2 splitter, and connect your HDTV Tuner's inputs to the **Out** ports of the splitter with the short coaxial cables.

\* - All pictures shown are for illustration purposes only. Actual product appearance may vary.

## ➤ Connect the TV Input

Depending on your TV provider source, you may connect the TV inputs in one of the following ways:

### ❶ Do You Have a Set-top Box (STB)?


1. **No** – Go to Connecting Directly from a Coaxial Cable below.
2. **Yes** – Go to ❶ How Many Set-top Boxes (STB's) Do You Have?

Connecting Directly from a Coaxial Cable:

1. Take your incoming cable or satellite coaxial cable and plug it into the “In” Port of the supplied 1-to-2 coaxial splitter.
2. Plug the output ends of the coaxial cable into the V TV Coaxial Input using the included short coaxial jumper cables.
3. ➤ Move on to the next section, ➤ Connect the Video Output on page 12



1-to-2 coaxial splitter



Looking for the Next Section?

Look for this icon. It denotes the start of a new section



Included IR Blaster



Remote Receiver

### ❶ How Many Set-top Boxes (STBs) Do You Have?

1. **Two (2)** – Connect the two (2) included IR blasters, as shown on the left, to the back remote receiver. There are two inputs, marked ❶ and ❷. Place the IR blasters/outputs over the IR receiver ports on each of the two STB's. Go to Connecting a Splitter below.
2. **One (1)** – Connect one of the included IR blasters to back of the remote receiver in the IR out port labeled ❶. Then, place the blaster output over the IR receiver ports of the STB. After it is connected, go to ❶ How Did You Connect to the Set-top Box (STB)? Note: You can only watch or record one show at a time until you get another STB.

Connecting a Splitter:

1. Take your incoming coaxial cable and plug it into the “In” Port of the supplied 1-to-2 coaxial splitter.
2. Plug the 2 output coaxial cables into each cable or satellite input of the set-top boxes (STBs).
3. Move on to ❶ How Did You Connect the TV to the Set-top Box (STB)?



## ① How Did You Connect the TV to the Set-top Box (STB)?

### Want the Best TV Quality?

TV input quality, starting from the best/preferred connection, is rated as follows:

1. Coaxial (Good)
2. Composite (Better)
3. S-video (Best)

1. Through a coaxial connection – Go to Connecting from a Coaxial Cable.
2. Through an S-video or RCA (yellow, red & white plugs) connections – Go to Connecting from S-Video/RCA Cables.

#### Connecting from a Coaxial Cable:

1. If not already connected, connect one end of a coaxial cable into the “Out” port of your STB.
2. Plug the other end into the V TV Coaxial Input on the back of the VidaBox™.
3. You’re finished connecting the first set-top box! Repeat if you have another STB.
4. ➤ Move on to ➤ Connect the Video Output

#### Connecting from S-Video/RCA Cable:



#### TV-In Adapter

Yours may appear slightly different, but it will have all 4 connections – S-Video & RCA (Yellow, Red, & White) cables

1. Connect the TV-In Adapter into the X TV S-Video & RCA Input.
2. Connect the video cable (choose S-video or yellow RCA cable):
  - If you chose the S-video cable, one end is connected to the TV-In Adapter, and the other end is connected to your set-top box.
  - If you chose the yellow RCA cable, one end is connected to the TV-In Adapter, and the other end is connected to your set-top box.

**Note:** You only need to connect **either** the S-video **or** the yellow RCA video cable. **You do not need to connect both.**

3. Connect one end of the red & white RCA cables into the “Audio Out” port of your STB. These cables are for the audio portion of your TV input.
4. Connect the other end of the red & white RCA cables into the TV-In Adapter.
5. You have now finished connecting the video and audio TV inputs for an STB! Repeat if you have another STB.
6. ➤ Move on to ➤ Connect the Video Output



You have completed the TV input installation!



## ➤ Connect the Video Output

Want the Best Video Output Quality?

Video output quality, starting from the best/preferred connection, is rated as follows:

1. Coaxial (Passable)
2. Composite (Fair)
3. S-video (Good)
4. Component (Better)
5. VGA/DVI/HDMI (Best)



Component & S-Video Box/TV-Out Dongle



VGA Cable



DVI/HDMI Cable



Component Cables

Every VidaBox™ SLIM™ comes with a high-quality S-Video cable. If you wish to connect your SLIM™ to the TV's video input using a different cable(s), please purchase it from your local dealer, or through our online store.

Note: Your VidaBox SLIM may have upgraded, dedicated video outputs. Be sure to use these inputs first, as marked on the rear of the box, for optimal video performance and image clarity.

### ⓘ Which Video Output / Cable Are You Using?

1. VGA/DVI/DVI-HDMI Cable – Go to Connecting via VGA/DVI/DVI-HDMI
2. Component Cables – Go to Connecting via Component
3. S-Video Cable – Go to Connecting via S-Video
4. Composite Cable\* – Go to Connecting via Composite
5. Coaxial Cable\* – Go to Connecting via Coaxial

Connecting via VGA/DVI/DVI-HDMI:

1. Plug one end of the VGA, DVI, or DVI-HDMI cable into its appropriate output.

| Video Connections | Dedicated Card | Onboard Graphics |
|-------------------|----------------|------------------|
| VGA               | F              | L                |
| DVI/DVI-HDMI      | G              | M                |

2. Plug the other end into your monitor/TV screen's VGA, DVI, or HDMI port.
3. You're finished! Move on to ➤ Connect the Audio Output

Connecting via Component:

1. **Dedicated output:** Take the TV-Out Dongle and plug it into the H Dedicated Component / S-Video Output on the back panel, then connect one end of the component cables into the TV-Out Dongle.

**Onboard output:** Connect one end of the component cables into the Q Component Video Outputs.

2. Connect the other end of the component cables into your television.
3. You're finished! Move on to ➤ Connect the Audio Output

## INSTALLATION



Component & S-Video  
Box/TV-Out Dongle



S-video Cable



S-Video/Composite  
Adapter



Composite RCA Video Cable



Coaxial Cable



S-video to Coaxial Converter  
(optional)

Connecting via S-Video:

1. ***Dedicated output:*** Take the TV-Out Dongle and plug it into the H Dedicated Component / S-Video Output on the back panel, then connect one end of the S-Video cable into the TV-Out Dongle

***Onboard output:*** Connect one end of the S-Video cable into the P S-Video Output.

2. Connect the other end of the S-video cable into your television.
3. You're finished! Move on to ➤ Connect the Audio Output

Connecting via Composite\*:

1. Follow **step 1** above for **Connecting via S-Video**.
2. Plug the output end of the S-Video to a S-Video to Composite Video adapter.
3. Connect one end of the composite video cable into the output end of the S-Video to Composite Video adapter.
4. Connect the other end of the Composite Video cable into the TV.
5. You're finished! Move on to ➤ Connect the Audio Output

Connecting via Coaxial\*:

1. Follow **step 1** above for **Connecting via S-Video**.
2. Connect the other end of the S-video cable into the S-video-in port of the S-video to Coaxial Converter.
3. Take a coaxial cable and plug it into the output coaxial port of the S-video to Coaxial Converter.
4. Connect the other end of the coaxial cable into your television.
5. You're finished! Move on to ➤ Connect the Audio Output



You have completed the video output installation!

## ➤ Connect the Audio Output

Every VidaBox™ SLIM™ comes with a high-quality set of L/R RCA audio cables and 3.5mm converter for 2.0 stereo sound. If you wish to connect the audio output of your SLIM™ differently, please purchase the appropriate cables from your local dealer, or through our online store.

### ❗ Which Audio Output / Cable Are You Using?

If you are using...

- 2.0 RCA (L/R) stereo sound RCA cables, or
- A direct 3.5 to 3.5mm stereo sound cable, or
- 5.1/7.1 analog surround sound cables –

Go to Connecting via Analog Sound

- Digital Coaxial Cable –

Go to Connecting via Digital Sound

Connecting via Analog Sound:

1. Do not connect any audio cables at this time. You will do so while configuring the software, which will be covered in the next manual – **Software Configuration**.



Coaxial SPDIF  
Audio Cable

Connecting via Digital Sound:

1. Plug one end of the SPDIF cable into the S SPDIF-Out port.
2. Plug the other end of the SPDIF cable into your receiver.
3. That's it! The audio is now connected from the VidaBox™ to the receiver.



You have completed the audio output installation!

## ➤ Connect the Wireless Keyboard

After installing the video and audio outputs, it is time to connect and synchronize the wireless keyboard to its receiver. Make sure that the wireless keyboard receiver is connected to the VidaBox™, and start the SLIM™ by pressing the D Power Button.

1. Place the 3 included ‘AA’ batteries into the keyboard. Be careful to observe polarity – improper battery installation may damage the keyboard.
2. Connect the USB receiver to the USB extension cable, and **place the USB receiver in a location where it will have full line-of-sight with your keyboard at all times.**
3. Bring the wireless keyboard within 3 feet to the USB receiver with clear line-of-sight (i.e. no obstructions).



Keyboard  
Synchronization  
Button

Press this button to synchronize the wireless keyboard with its receiver.

4. Look for a small “sync” button on the USB receiver, as shown on the right. Be sure it is connected to the VidaBox™ and the VidaBox™ is turned **on**.
5. Using a paper clip or other small object, press and hold this button down for at least 3 seconds.
6. On the wireless keyboard, hit the synchronization button, as shown on the left.
7. Give the keyboard a few moments, and it should connect to the USB receiver.
8. If this does not work, try replacing the batteries with a fresh set and try again from step 2.

Note: For battery replacement, note that less expensive, non-brand name “value” batteries are not recommended for use with our equipment, as they may not supply enough energy for performance. If the problem persists, please contact us.



## You've Finished the Hardware Installation!

After completing the hardware installation, you can proceed to set up the software by referring to the **Software Configuration Guide**.

## ➤ The Next Step

Congratulations! You've set up all of the physical connections for the VidaBox™ SLIM! The next step is to properly configure the software. Refer to the "Software Configuration Guide" for the next steps.

If you find that you are having trouble configuring the software or having the VidaBox™ function properly, it may be due to improper physical connections. You may want to go back and review all of the installation steps to be sure no mistakes were made, and you can also use the included **Troubleshooting Guide** to help diagnose your problem.

If all else fails, you can seek further assistance as denoted in our ➤ Service Information section on the next page.



## Register Your VidaBox™!

For faster service, please don't forget to register your VidaBox™ at <http://www.vidabox.com/register.htm> within 10 days of purchase. This will automatically activate your all-inclusive limited-time warranty, and allow us to help you as quickly as possible!

If you haven't registered your VidaBox™ and need service – be prepared to give your purchase information, such as serial number, date & place of purchase, etc. This will allow us to give genuine VidaBox™ owners like you top priority and express service.

## ➤ Service Information

Thank you for purchasing a VidaBox™, the system that makes Home Entertainment Simple! Please take some time now to review and familiarize yourself with our warranty policy by visiting our website at <http://www.vidabox.com/warranty>.

### Contact Your Dealer/Place of Purchase:

- If you find that you are having trouble installing or setting up the VidaBox™, first try using the included **Troubleshooting Guide** to resolve your problem.
- If you need further assistance, please contact you dealer or place of purchase.
- If you need additional assistance that your dealer cannot provide, if you purchased a service protection plan, or if you purchased your VidaBox™ directly from us, you can contact us using one of the following ways:
  1. VidaBox™ Online Support – Our forums are full of common tips and troubleshooting knowledge. Feel free to search your answer. If you can't find your answer, register for free and post your question. The forums are constantly monitored, and one of our community members will be able to help you in no time.
  2. Phone-based Support – Please see our website for business hours. Live phone support is available for free for all new VidaBox™ owners for a limited-time, as part of our warranty policy. An extended support plan is also available as an upgrade option when you purchase the VidaBox™. After the warranty period expires, you can get support on a fee-based basis.

### Contact VidaBox LLC:

Whenever you need support – VidaBox™ will be there. That's our guarantee.

### Contact Information:

Website: [www.vidabox.com](http://www.vidabox.com)

Online support: [www.vidabox.com/support](http://www.vidabox.com/support)

Phone-based support: See the inside cover of the **Troubleshooting Guide**



---

Copyright ©2006 VidaBox LLC.

VidaBox™, and its model names ROOMMATE™, SLIM™, LUX™, and MAX™ are registered trademarks or trademarks of VidaBox LLC. All other company, product, and trademark names mentioned herein are for identification purposes only and are the sole property of their respective owners. This document is accurate as of July 2006. However, VidaBox LLC reserves the right to make modifications or changes to the document without further notice. This document is not intended to obligate VidaBox LLC or any other entity to any functionality and technology, but to merely inform the audience. VidaBox LLC makes no warranties, expressed or implied in or by this document and specifically disclaims any implied warranty of merchantability or fitness for a particular purpose.

Version 1.0b